

```
ejr1.html > html > head
1 <!DOCTYPE html>
2 <html>
3
4 <head>
5
6 <title>Arlet_Laos</title>
7
8 </head>
9 <body>
10
11 <h1 style="background-color: Mediurgb(60, 145, 179)"> Mi gran mundo entre letras </h1>
12 <p>Adentrarte a un mundo diferente para transmitir lo que alguna vez no dije perc
13
14 <h1>Escritos y Motivaciones a un ser querido</h1>
15 <h2>Sentimientos y Pensamientos mas profundos de lo mas grande de mi corazon</h2>
16 <h3>Alguna vez has te has encontrado que una inspiracion espacial que te hace ade
17
18 <a href="https://www.w3schools.com/" target="_blank"> escritos secretos en la luz
19
20 <div>
21 <h2>escritooooo</h2>
22 <p>Aquello que se transmite mediante lo que no se expresa a la ligera por el gra
23 <p>transmitir, abordar y describir lo que sientes para poder decirte.</p>
24
25
```

Welcome to Copilot
Let's get started

Build workspace
Show project config
Review AI output carefully before use

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS powershell + v

On branch main

No commits yet

Changes to be committed:
(use "git rm --cached <file>..." to unstage)
new file: ejr1.html



```
PS C:\Users\Alejandra Laos\Documents\ejercicios\ejemplo> git commit -m "primer cambio"
```

```
[main (root-commit) e22906e] primer cambio
1 file changed, 30 insertions(+)
```

```
create mode 100644 ejr1.html
PS C:\Users\Alejandra Laos\Documents\ejercicios\ejemplo>
```

Búsqueda



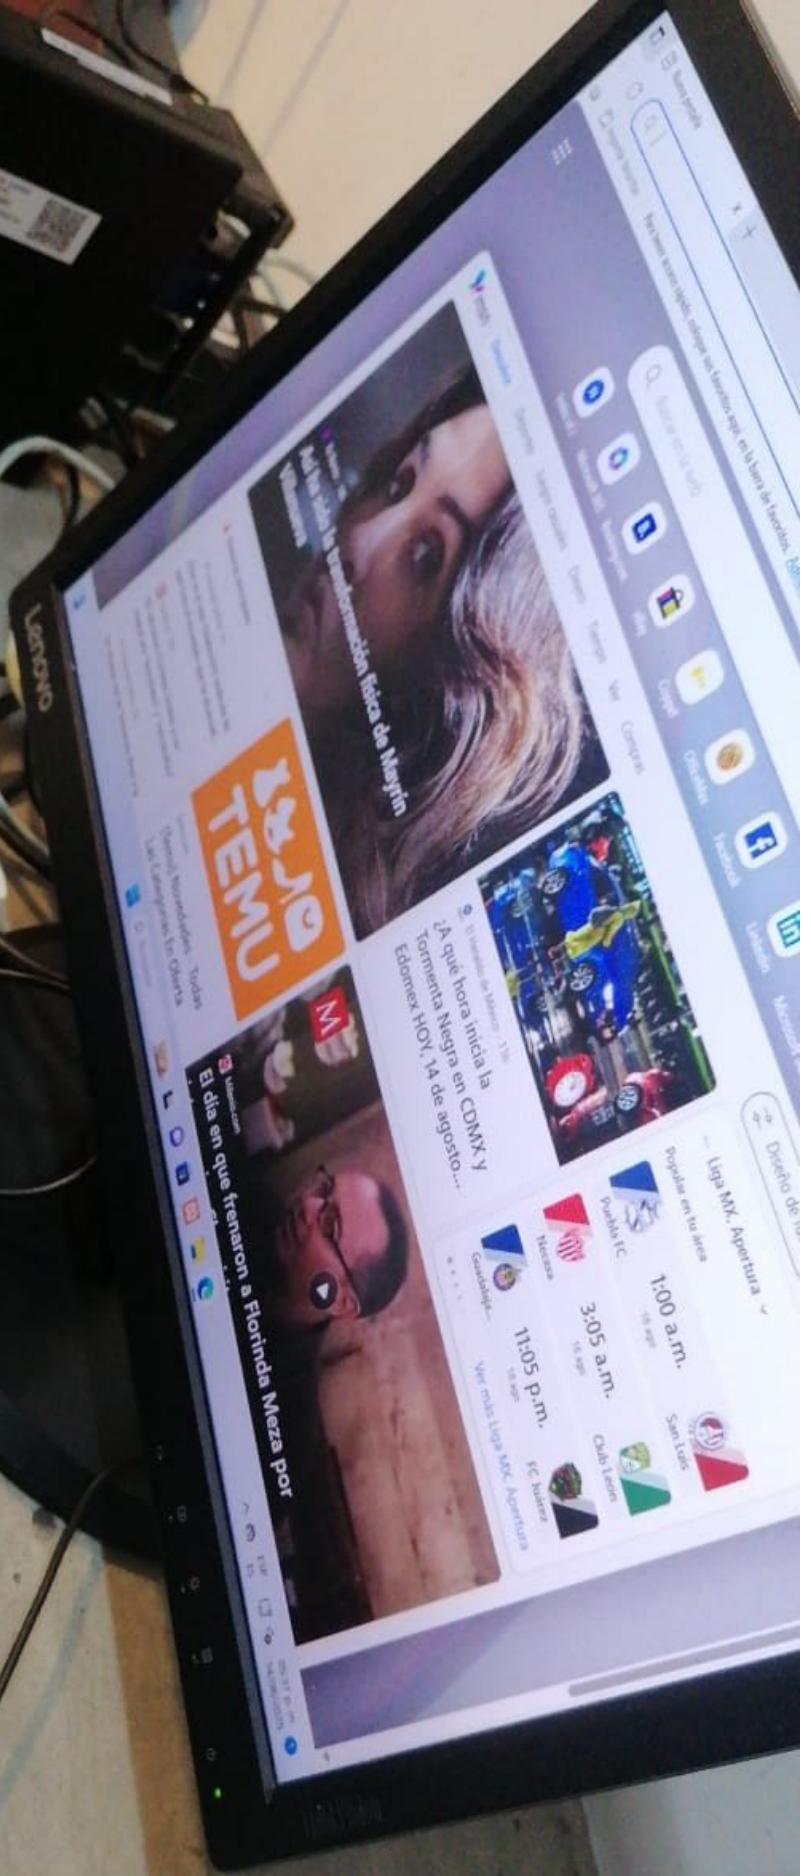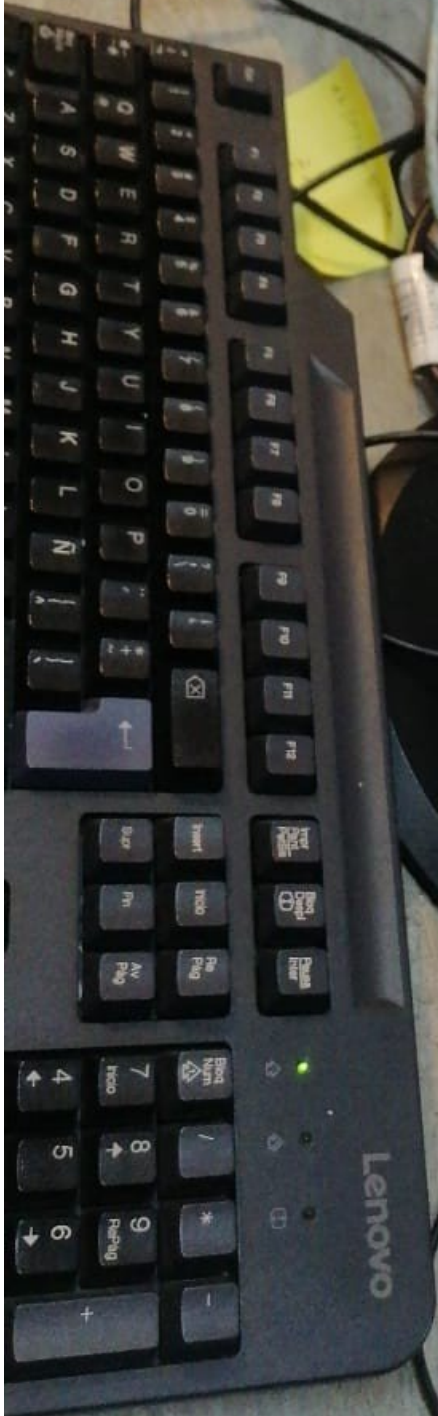

Example

```
<!DOCTYPE html>  
<html>  
  <head>  
    <title>Page Title</title>  
  </head>  
  <body>  
  
    <h1>My First Heading</h1>  
    <p>My first paragraph.</p>  
  
  </body>  
</html>
```

[Try it Yourself »](#)

Example Explained

... defines that this document is an HTML5 document
... HTML page
... page
... browser's title bar or in the page's tab)
... such as headings, paragraphs, images,

Connection Name: GDN Remoto

Connection Remote Management System Profile

Connection Method: Standard (TCP/IP) Method to use to connect to the RDBMS

Parameters SSL Advanced

Hostname: 162.241.62.137 Port: 3306 Name or IP address of the server host - and TCP/IP port.

Username: eidancom_gdn Name of the user to connect with.

Password: Store in Vault ... Clear The user's password. Will be requested later if it's not set.

Default Schema: The schema to use as default schema. Leave blank to select it later.



<input checked="" type="checkbox"/> clases\T_Funcionarios.class.php		<input checked="" type="checkbox"/>	3	+ // require_once("../config/DB_CRUD.class.php");
<input type="checkbox"/> composer - copia.lock		<input checked="" type="checkbox"/>	4	+ require_once(BASE_PATH . "config/DB_CRUD.class.php");
<input type="checkbox"/> DB\2025-05-29-DB.sql		<input checked="" type="checkbox"/>	5	+
<input type="checkbox"/> DB\respaldo-25-07-11-eidancom_gdn_eventos_direcciones.sql		<input checked="" type="checkbox"/>	6	+ class Funcionarios extends CRUD
<input type="checkbox"/> DB\respaldo-25-07-17-eidancom_gdn_eventos_direcciones.sql		<input checked="" type="checkbox"/>	7	+ {
<input checked="" type="checkbox"/> forms\registro-funcionarios\controller.php		<input checked="" type="checkbox"/>	8	+ protected \$tabla = "funcionarios";
<input checked="" type="checkbox"/> forms\registro-funcionarios\views\footer.tpl		<input checked="" type="checkbox"/>	9	+ protected \$pk = "id_peticionario";
<input checked="" type="checkbox"/> forms\registro-funcionarios\views\main.tpl		<input checked="" type="checkbox"/>	10	+ public \$debug = false;
		<input checked="" type="checkbox"/>	11	+ }
		<input checked="" type="checkbox"/>	12	+
		<input checked="" type="checkbox"/>	13	+
		<input checked="" type="checkbox"/>	14	+ ?>

id-mejora

mejora - nombre

id-cat-necesidad

n1 n2 ... n5

Cat-necesidad

m1
m2
m3

